



Galactic Beam


Commercial linear lighting for recessed applications

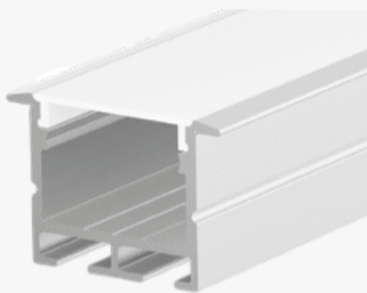

Profile Picture

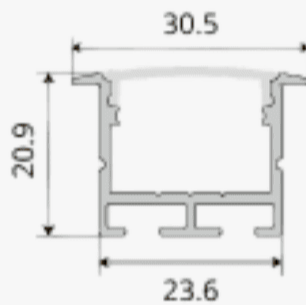


Cross-Section

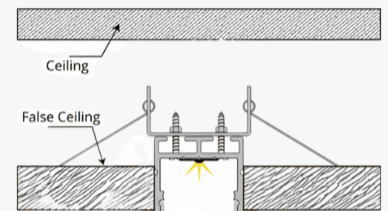

Light Direction


Technical Specifications	
Code	SLL3020X
Size	30.5 x 20.9 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54

Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Frosted, Milky)
CCT	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBW, RGBWW
Watts/M	4.5W - 22.5 W
Light Direction	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Minimal Linear Details, Seamless Recessed Illumination, Furniture Integration, Contemporary Interior Accents, Slim Ceiling Grooves, Refined Architectural Lighting

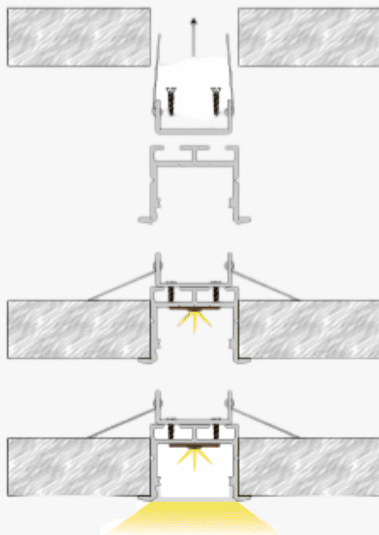

Installation Guide


Installation Accessories Light Direction Plot



End Caps



Mounting Accessories

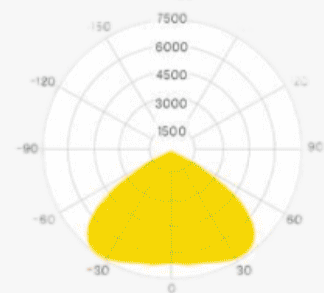

120°