



# Phantom Beam


Commercial linear lighting for recessed applications

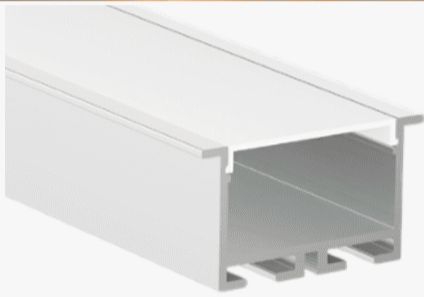

Profile Picture

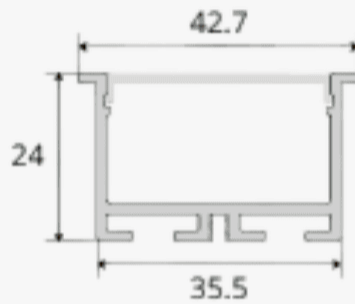

Cross-Section

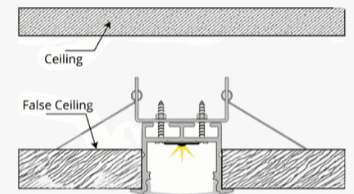


Light Direction

## Technical Specifications

<b>Code</b>	SLL4224X
<b>Size</b>	42.7 x 24 mm
<b>CRI</b>	85+
<b>Input Power</b>	24 V DC
<b>IP Rating</b>	IP40/IP54


## Custom Options Available

<b>DIFFUSER</b>	PMMA Diffuser (Opal, Frosted, Milky)
<b>CCT</b>	2200K/2700K/3000K/3500K/4000K /5000K/6000K/6500K , Tunable White, RGB, RGBW, RGBWW
<b>Watts/M</b>	4.5W - 32.5 W
<b>Light Direction</b>	120 Degrees
<b>Finish</b>	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
<b>Application</b>	Slim Ceiling Recesses, Seamless Linear Details, Contemporary Interior Lighting, Minimal Architectural Grooves, Soft Linear Accents, Modern Spatial Design

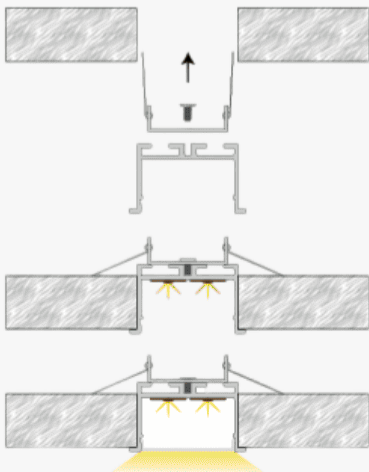


Installation Guide

## Installation Accessories




End Caps



Mounting Accessories

## Light Direction Plot

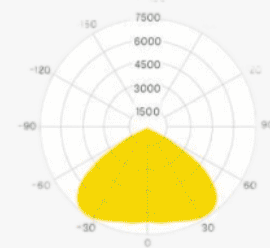

120°