




Profile Picture



Cross-Section/
Dimension

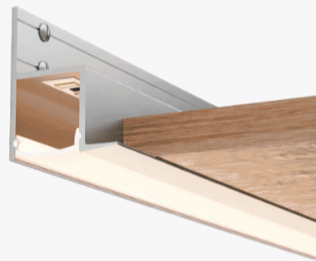


Product Picture

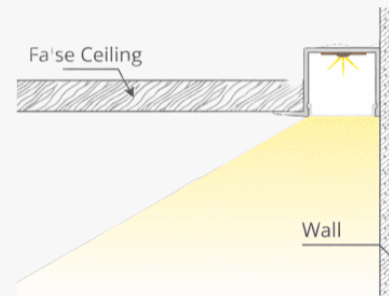

Light Direction


Technical Specifications	
Code	SLL3545X
Size	35 x 45 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54

Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Frosted, Milky)
CCT	2200K/2700K/3000K/3500K /4000K/5000K/6000K/6500K , Tunable White, RGB, RGBW, RGBWW
Watts/M	4.5W - 22.5 W
Light Direction	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Perimeter Glow Lighting, Wall-Ceiling Transitions, Indirect Architectural Illumination, Seamless Cove Details, Ambient Spatial Lighting, Luxury Interior Accents

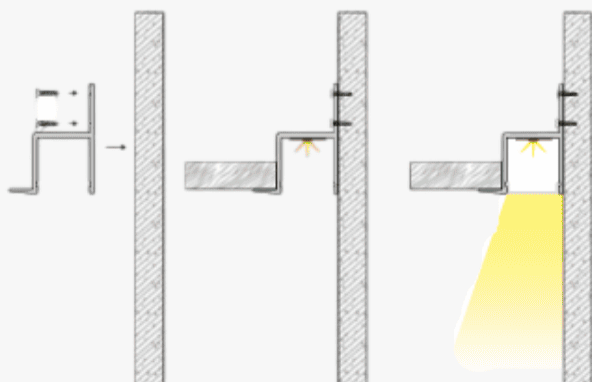


Installation Guide

Installation Accessories



End Caps

Light Direction Plot

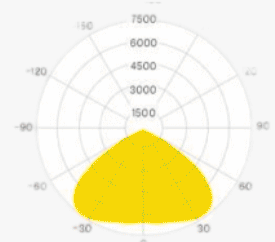

120°