




Profile Photo

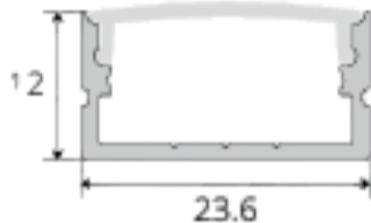

Profile Dimension




Product Picture

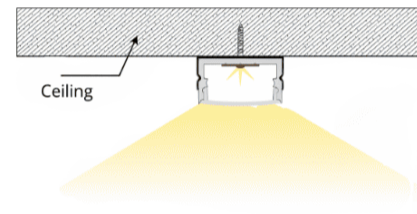

Light Direction

Technical Specifications	
Code	SLL2316Z
Size	23.6 x 12 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54

Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Milky, Frosted)
CCT	2200K/2700K/3000K/3500K /4000K/5000K/6000K/6500K , Tunable White, RGB, RGBWW, RGBA
Watts/M	4.5W - 19.5 W
Beam Angle	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Under-Cabinet Lighting, Cove Details, Display Shelving, Furniture Integration, Retail Highlights, Architectural Accent Lighting

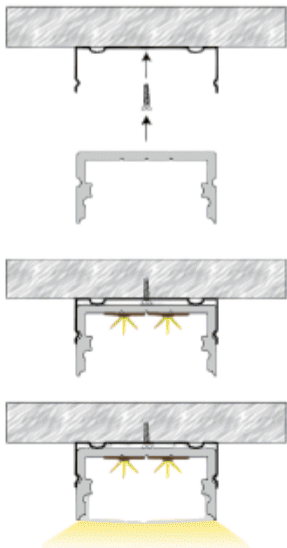


Installation Guide

Installation Accessories



End Caps and Mounting Cap

Light Direction Plot



120°