




Built Around the Language of Modern Architecture.

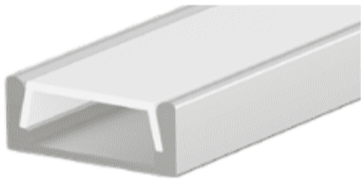


Profile Photo

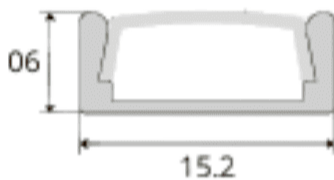

Profile Dimension

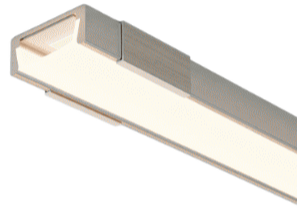


Product Picture

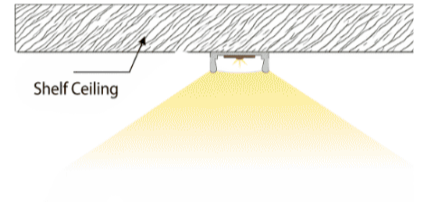

Light Direction

Technical Specifications	
Code	SLL1506Z
Size	15.2 x 6 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54

Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Milky, Frosted)
CCT	2200K/2700K/3000K/3500K /4000K/5000K/6000K/6500K , Tunable White, RGB, RGBWW, RGBA
Watts/M	4.5W - 14.5 W
Beam Angle	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Shelf Lighting, Cabinet Illumination, Display Lighting, Under-Cabinet Lighting, Furniture Integration, Decorative Accent Lighting

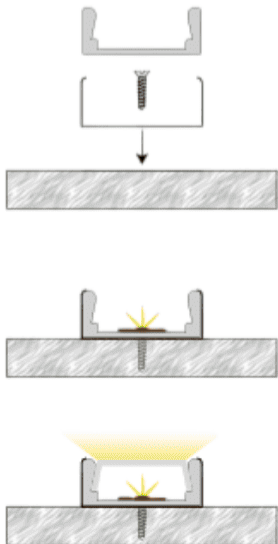


Installation Guide

Installation Accessories



Mounting Cap and End Caps

Light Direction Plot

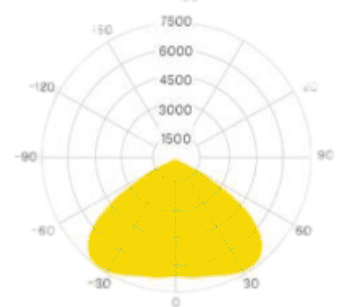

120°