




Profile Picture

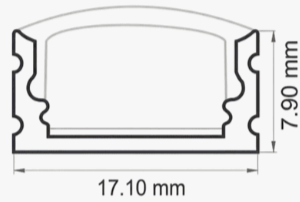

Profile Dimension

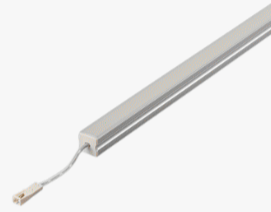


Product Picture



Light Direction

Technical Specifications	
<b>Code</b>	SLL1779
<b>Size</b>	17.1 x 7.9 mm
<b>CRI</b>	85+
<b>Input Power</b>	24 V DC
<b>IP Rating</b>	IP40/IP54

Custom Options Available	
<b>DIFFUSER</b>	PMMA Diffuser (Milky, Frosted, Clear)
<b>CCT</b>	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBW, RGBWW
<b>Watts/M</b>	4.5W - 19.5 W
<b>Beam Angle</b>	120 Degrees
<b>Finish</b>	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
<b>Application</b>	Ceiling Cove Lighting, Under Cabinet Lighting, Decorative Lighting, Kitchen lighting, Bedroom Lighting, Edge Lighting

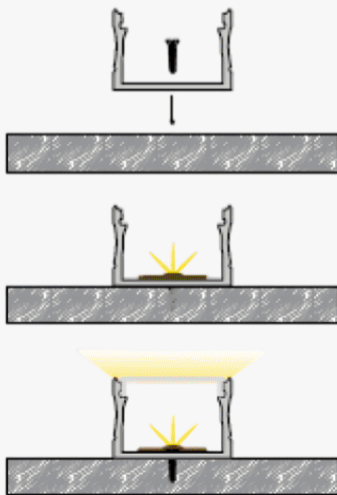

Installation Guide


### Installation Accessories



End Caps

Mounting Clips

### Light Direction Plot

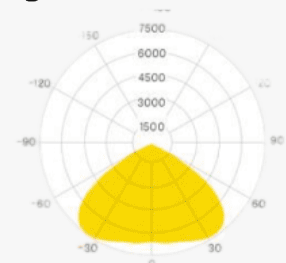

120°