

Profile Picture


Cross-Section/
Dimension

Product Picture

Light Direction

Technical Specifications	
Code	SLL6532
Size	65 x 32 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP20/IP54


Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Milky, Frosted)
CCT	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBW, RGBWW
Watts/M	11.5W - 33.5 W
Beam Angle	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL
Application	Minimal Ceiling Lines, Indirect Ambient Lighting, Continuous Diffused Illumination, Architectural Details, Contemporary Spaces, Visual Comfort Lighting

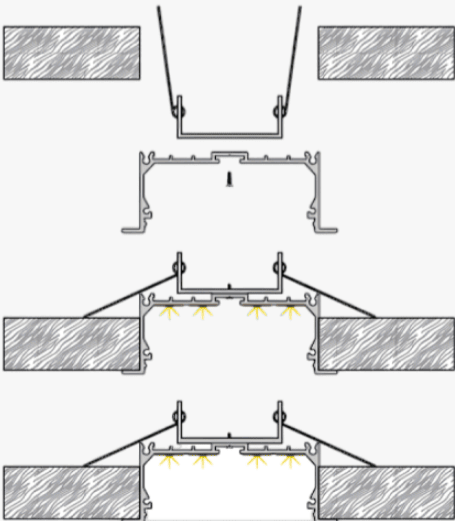

Installation Guide


Installation Accessories

Light Direction Plot

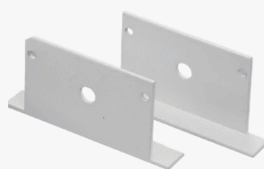

End Caps

Mounting Clips



120°