



Precision Light for Modern Geometry.

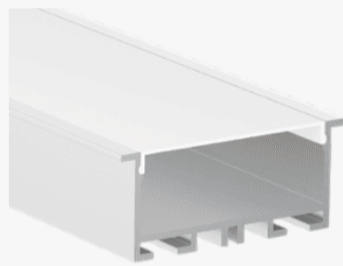


Profile Picture

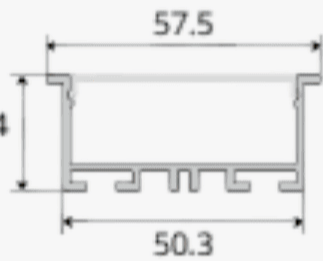

Cross-Section



Product Picture

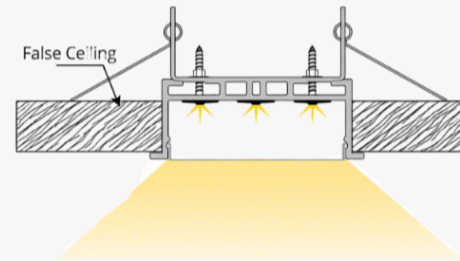


Light Direction

Technical Specifications

Code	SLL5724X
Size	57.5 x 24 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54


Custom Options Available

DIFFUSER	PMMA Diffuser (Opal, Frosted, Milky)
CCT	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBW, RGBWW
Watts/M	11.5W - 34.5 W
Light Direction	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Seamless Ceiling Lines, Contemporary Recessed Illumination, Architectural Groove Lighting, Minimal Spatial Detailing, Linear Ceiling Accents, Modern Interior Integration

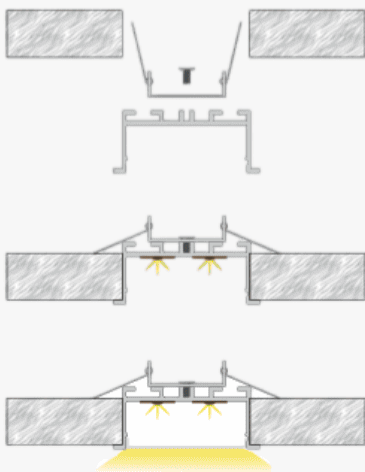


Installation Guide

Installation Accessories




End Caps



Mounting Accessories

Light Direction Plot

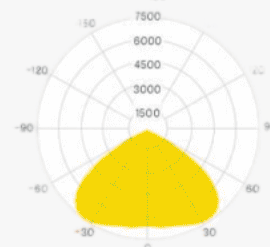

120°