

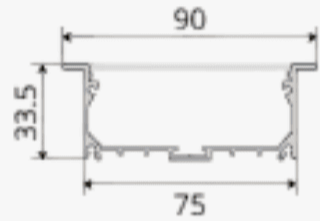


Commercial linear lighting for recessed applications

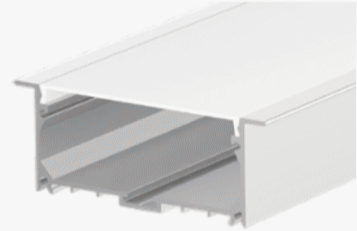


Profile Picture **Cross-Section**

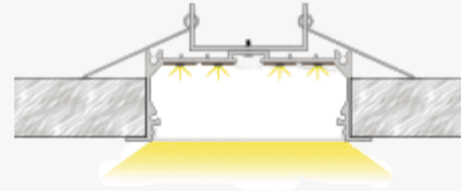

Product Picture **Light Direction**


Technical Specifications	
Code	SLL9033X
Size	90 x 33.5 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54

Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Frosted, Milky)
CCT	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBW, RGBWW
Watts/M	4.5W - 39.5 W
Light Direction	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Drywall Integration, Continuous Recess Systems, Architectural Ceiling Grooves, Seamless Linear Installations, Contemporary Ceiling Details, Minimal Spatial Lighting

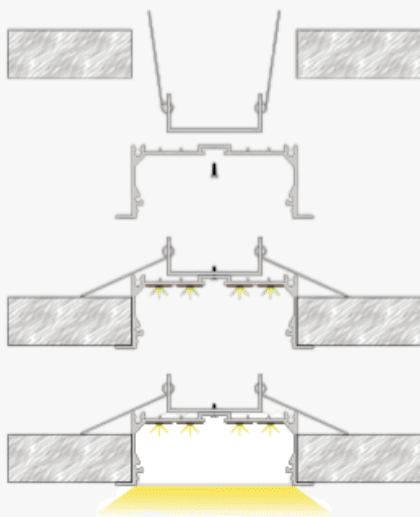

Installation Guide

Installation Accessories




End Caps



Mounting Accessories

Light Direction Plot

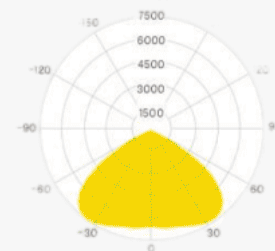

120°