



Profile Picture



Profile Dimension

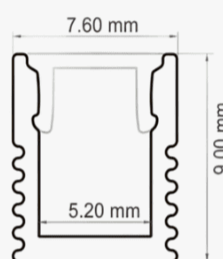


Product Picture

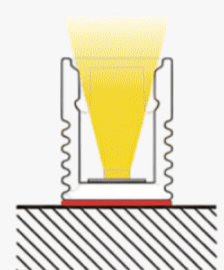

Light Direction

Technical Specifications	
<b>Code</b>	SLL7690
<b>Size</b>	7.6 x 9.0 mm
<b>CRI</b>	85+
<b>Input Power</b>	24 V DC
<b>IP Rating</b>	IP40/IP54

Configuration Options Available	
<b>DIFFUSER</b>	PMMA Diffuser(Milky,Frosted)
<b>CCT</b>	2700K/3000K/4000K
<b>Watts/M</b>	4.5W - 11.5W
<b>Beam Angle</b>	120 Degrees
<b>Finish</b>	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
<b>Application</b>	Under Cabinet, Furniture & Joinery, Display Shelving, Cove & Shadow Gap, Wardrobes & Closets, Architectural Accent Lighting

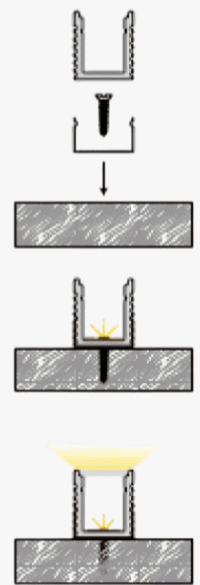

### Installation Accessories




End Caps



Mounting Clips

### Light Direction Plot

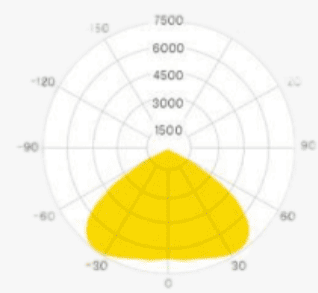

120°

### Installation Guide