



Wide-profile linear lighting for uniform light distribution




Profile Photo

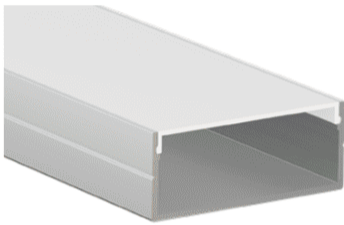

Profile Dimension

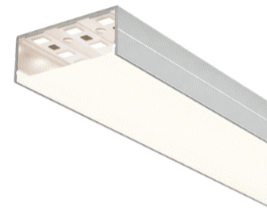

Product Picture

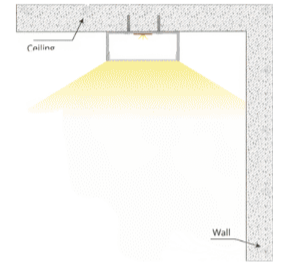


Light Direction

Technical Specifications

Code	SLL5020
Size	50.3 x 20 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54


Custom Options Available

DIFFUSER	PMMA Diffuser (Opal, Milky, Frosted)
CCT	2200K/2700K/3000K/3500K/4000K /5000K/6000K/6500K , Tunable White, RGB ,RGBWW, RGBA, Red, Green, Blue
Watts/M	9.5 W - 33.5 W
Beam Angle	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Recessed Ceiling Lines, Trimless Linear Lighting, Minimalist Interiors, Continuous Light Runs, Architectural Ceiling Details, Modern Commercial Spaces

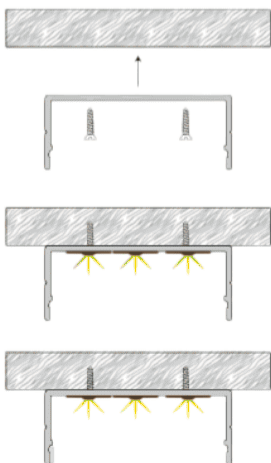


Installation Guide

Installation Accessories



End Caps

Light Direction Plot

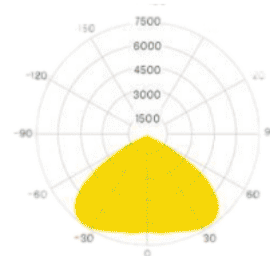

120°