

Profile Photo


Profile Dimension

Product Picture

Light Direction

Technical Specifications	
Code	SLL1214Z
Size	12 x 14 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54

Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Milky, Frosted)
CCT	2200K/2700K/3000K/3500K /4000K/5000K/6000K/6500K , Tunable White, RGB, RGBWW, RGBA
Watts/M	4.5W - 19.5 W
Beam Angle	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Micro Recessed Lighting, Joinery Detailing, Display Shelving, Shadow Gap Lighting, Cabinet Integration, Minimal Architectural Accents

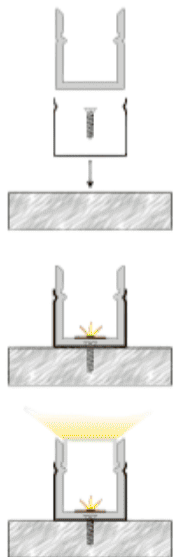


Installation Accessories



Mounting Cap and End Caps

Light Direction Plot



Installation Guide