


Profile Picture

Cross-Section/
Dimension



Product Picture

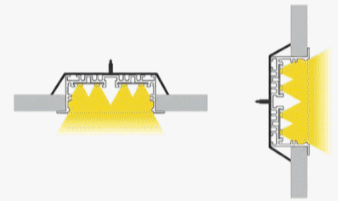


Light Direction

Technical Specifications

Code	SLL9032
Size	90 x 32 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP20/IP54


Custom Options Available

DIFFUSER	PMMA Diffuser (Opal, Milky, Frosted)
CCT	2200K/2700K/3000K/3500K /4000K/5000K/6000K/6500K , Tunable White, RGB, RGBW, RGBWW
Watts/M	9.5W - 38.5 W
Beam Angle	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL
Application	Ambient Cove Lighting, Diffused Ceiling Lines, Soft Architectural Illumination, Seamless Linear Lighting, Modern Interior Accents, Visual Comfort Lighting

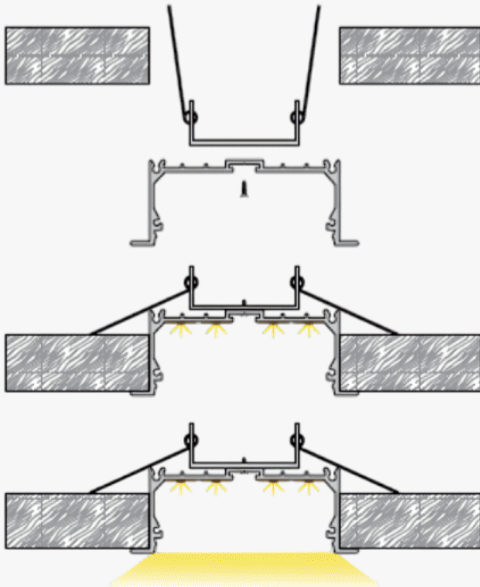

Installation Guide

Installation Accessories

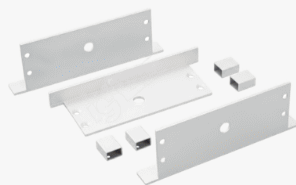


End Caps



Mounting Clips

Light Direction Plot

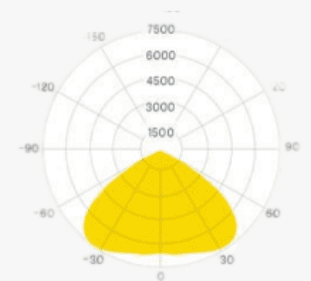

120°