


# Orbit Recess

Architectural Light, Simplified.



Profile Picture

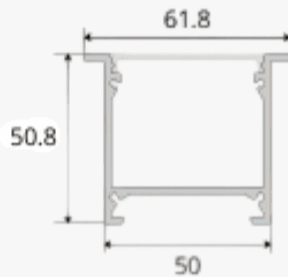


Cross-Section/  
Dimension



Product Picture

Technical Specifications	
<b>Code</b>	SLL6150X
<b>Size</b>	61.8 x 50.8 mm
<b>CRI</b>	85+
<b>Input Power</b>	24 V DC
<b>IP Rating</b>	IP40/IP54

Custom Options Available	
<b>DIFFUSER</b>	PMMA Diffuser (Opal, Frosted, Milky)
<b>CCT</b>	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBW, RGBWW
<b>Watts/M</b>	4.5W - 32.5 W
<b>Light Direction</b>	120 Degrees
<b>Finish</b>	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
<b>Application</b>	Trimless Ceiling Integration, Seamless Linear Recesses, Modern Architectural Lighting, Continuous Ceiling Geometry, Visual Comfort Illumination, Contemporary Interior Spaces

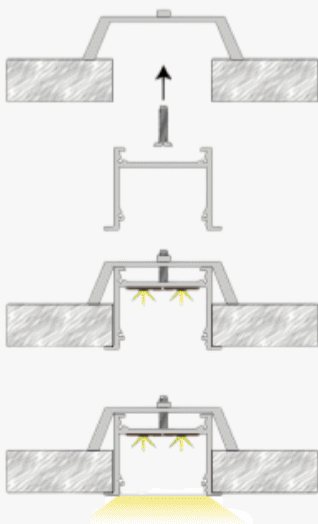


Installation Guide

## Installation Accessories




Mounting  
Accessories



End Caps

## Light Direction Plot

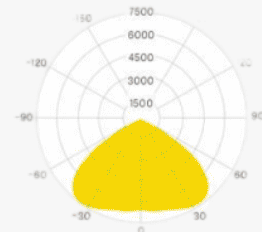

120°