
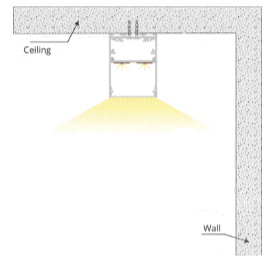

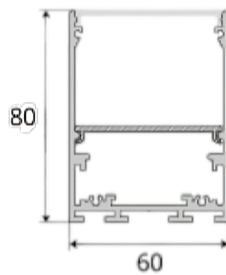


# Orbit Wide

Linear lighting for retail, commercial and architectural applications



Profile Photo


Profile Dimension

Product Picture


Light Direction

Technical Specifications	
<b>Code</b>	SLL6080Z
<b>Size</b>	60 x 80 mm
<b>CRI</b>	85+
<b>Input Power</b>	24 V DC
<b>IP Rating</b>	IP40/IP54

Custom Options Available	
<b>DIFFUSER</b>	PMMA Diffuser (Opal, Milky, Frosted)
<b>CCT</b>	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBWW, RGBA
<b>Watts/M</b>	11.5 W - 40.5 W
<b>Beam Angle</b>	120 Degrees
<b>Finish</b>	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
<b>Application</b>	Pendant Linear Lighting, Office Workspaces, Commercial Interiors, Conference Tables, Continuous Linear Runs

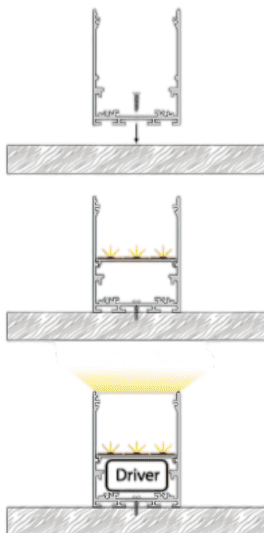


Installation Accessories



End Caps

Light Direction Plot

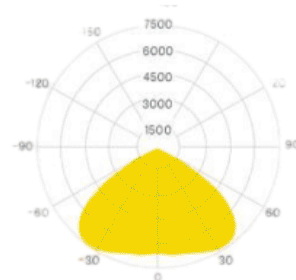

120°

Installation Guide