


Profile Picture



Cross-Section/  
Dimension

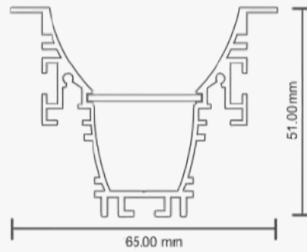


Product Picture

### Technical Specifications

<b>Code</b>	SLL6551
<b>Size</b>	65 x 51 mm
<b>CRI</b>	85+
<b>Input Power</b>	24 V DC
<b>IP Rating</b>	IP40/IP54


### Custom Options Available

<b>DIFFUSER</b>	PMMA Diffuser (Opal, Milky, Frosted)
<b>CCT</b>	2200K/2700K/3000K/3500K/4000K /5000K/6000K/6500K , Tunable White, RGB, RGBW, RGBWW
<b>Watts/M</b>	4.5W - 22.5 W
<b>Beam Angle</b>	120 Degrees
<b>Finish</b>	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
<b>Application</b>	Deep Recessed Lighting, Glare-Free Illumination, Ceiling Grooves, Architectural Ceiling Details, Premium Commercial Spaces, Visual Comfort Lighting

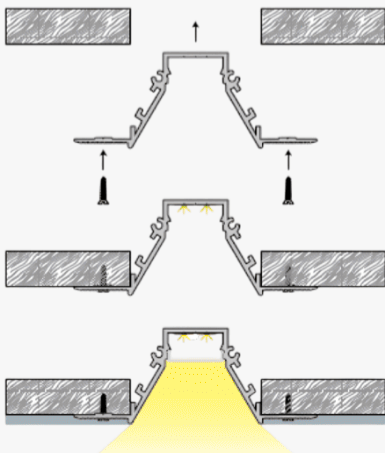

Installation Guide


### Installation Accessories

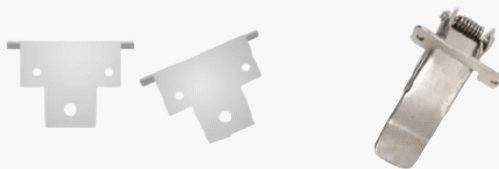

End Caps

Mounting Clips

### Light Direction Plot

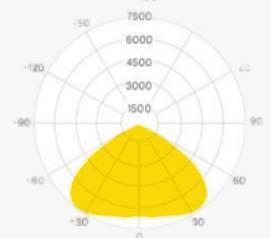

120°