
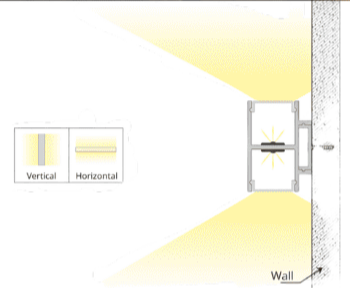
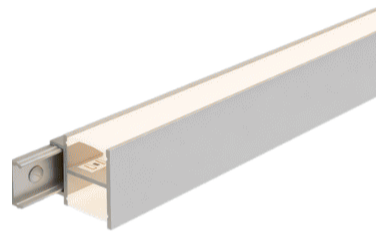
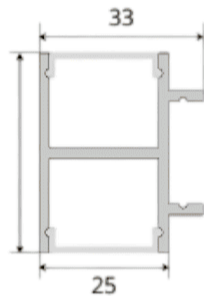


TwinBeam


Upward and downward lighting for uniform spatial illumination

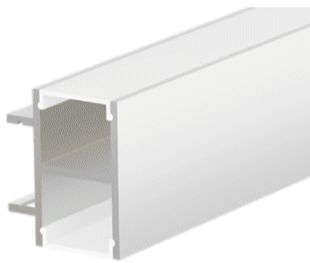

Profile Photo Profile Dimension Product Picture Light Direction


Technical Specifications	
Code	SLL3342
Size	33 x 42 mm
CRI	85+
Input Power	24 V DC
IP Rating	IP40/IP54

Custom Options Available	
DIFFUSER	PMMA Diffuser (Opal, Milky, Frosted)
CCT	2200K/2700K/3000K/3500K/4000K/5000K/6000K/6500K, Tunable White, RGB, RGBW, RGBWW
Watts/M	4.5W - 22.5 W
Beam Angle	120 Degrees
Finish	Custom Size and Custom Powder Coating finish or Anodized finish available upon request as per RAL code
Application	Commercial, Retail, Residential, and Architectural Accent Lighting

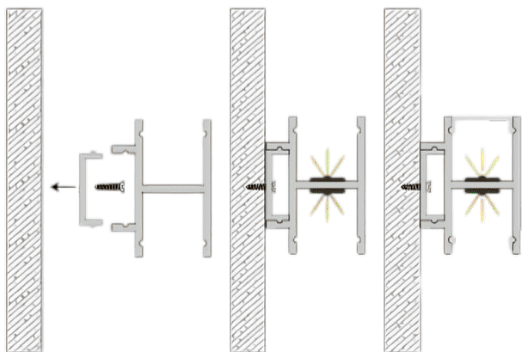

Installation Guide

Installation Accessories



End Caps Mounting Accessories

Light Direction Plot

